


OPEN LINK CHAINS (PITCH = 3 X SIZE)

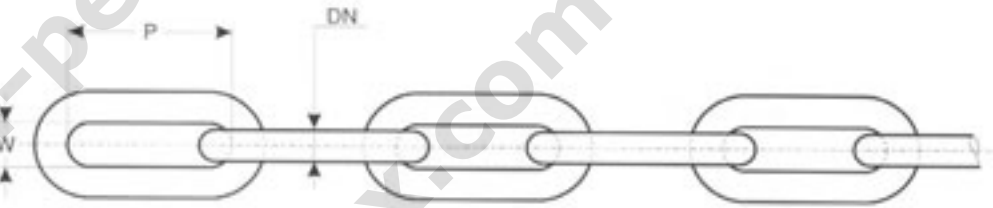

Upon request, chains are manufactured in SL 1 or SL 2 qualities as agreed to the Bureau Veritas.

Upon request, SL 3 quality.

DN	P	W	Qualite DL1	Quality SL1	Qualite SL2	Quality SL2	Nombre De mailles/m	kg /m
Nominal size	Pas Pitch	Largeur Width	TENSION Proof load	RUPTURE Breaking load	TENSION Proof load	RUPTURE Breaking load	NUMBER of links/m	
18	54	23	76	152	96	192	18.5	7.1
20	60	26	104	208	132	264	16.7	8.8
22	66	29	120	240	152	304	15.2	10.6
24	72	31	143	286	181	362	13.9	12.6
26	78	34	167	334	212	424	12.8	14.8
28	84	36	194	388	246	492	11.9	17.2
30	90	39	223	446	283	566	11.1	19.7
32	96	42	253	506	322	644	10.4	22.4
34	102	44	286	572	363	726	9.8	25.3
36	108	47	321	642	407	814	9.3	28.4
38	114	49	357	714	454	900	8.8	31.8
40	120	52	396	792	505	1010	8.3	35.0
42	126	55	436	872	555	1110	7.9	38.8
44	132	57	479	958	610	1220	7.6	42.4
46	138	60	525	1050	665	1330	7.2	46.3
48	144	62	570	1140	725	1450	6.9	50.5
50	150	65	620	1240	785	1570	6.7	54.8