


LONG OPEN LINK CHAINS (PITCH = 3,5 X SIZE)

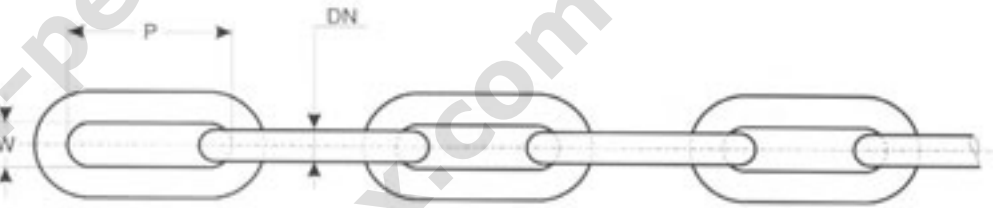

Upon request, chains are manufactured in SL 1 or SL 2 qualities as agreed to the Bureau Veritas.

Upon request, SL 3 quality.

DN	P	W	Qualite DL1	Quality SL1	Qualite SL2	Quality SL2	Nombre De mailles/m	
Nominal size	Pas Pitch	Largeur Width	TENSION Proof load	RUPTURE Breaking load	TENSION Proff load	RUPTURE Breaking load	NUMBER of links/m	kg /m
mm	mm	mm	kN	kN	kN	kN		
18	90	25	76	152	96	192	11.1	5.9
20	100	28	104	208	132	264	10.5	7.3
22	110	31	120	240	152	304	9.1	8.8
24	120	34	143	286	181	362	8.3	10.5
26	130	36	167	334	212	424	7.7	12.3
28	140	39	194	388	246	492	7.1	14.3
30	150	42	223	446	283	566	6.7	16.4
32	160	45	253	506	322	644	6.3	18.7
34	170	48	286	572	363	726	5.9	21.1
36	180	50	321	642	407	814	5.6	23.6
38	190	53	357	714	454	900	5.3	26.3
40	200	56	396	792	505	1 010	5	29.2
42	210	59	436	872	555	1 110	4.8	32.2
44	220	62	479	958	610	1 220	4.5	35.3
46	230	64	525	1 050	665	1 330	4.3	38.6
48	240	67	570	1 140	725	1 450	4.2	42
50	250	70	620	1 240	785	1 570	4	45.6