


**CHAINES SANS ETAIS OFFSHORE
STUDLESS LINK OFFSHORE**

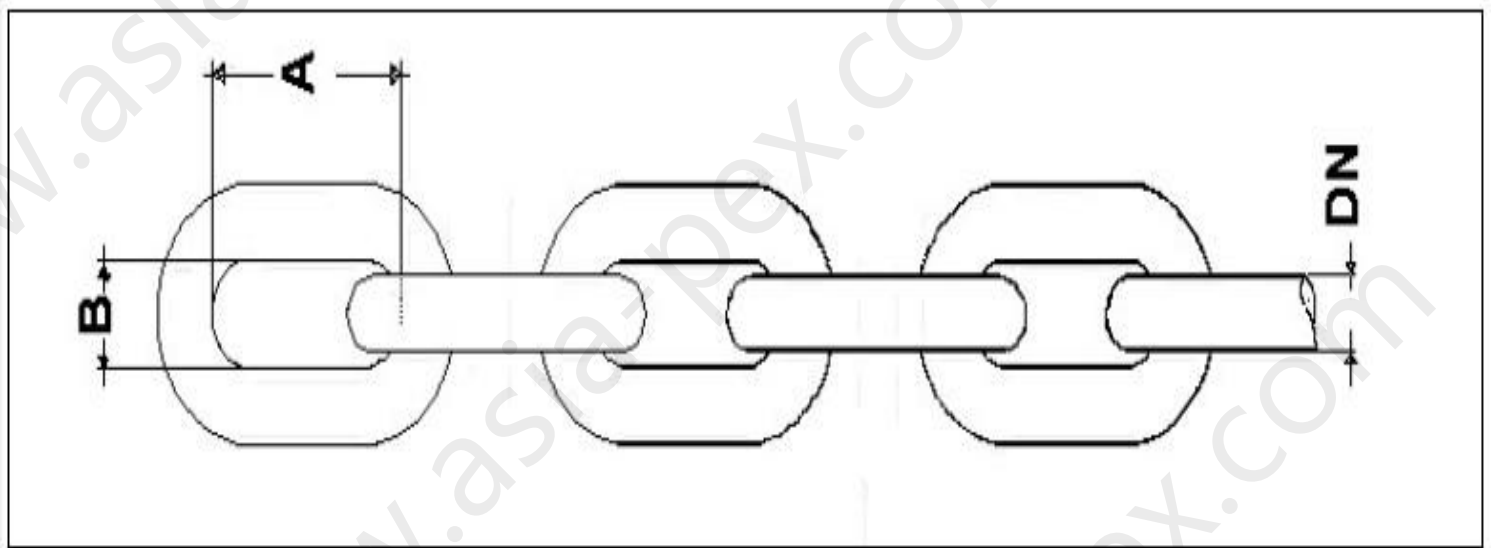

DN		DIMENSIONS					
Diametre nominal Nominal Size		MAILLE ORDINAIRE COMMON LINK		R3 S		R4	
mm	Inches	A mm	B mm	Tension Proof load	Rupture Breaking load	Tension Proof load	Rupture Breaking load
16	5/8	64	58	190	272	210	300
17.5	11/16	70	63	227	325	250	357
19	3/4	76	68	267	382	294	420
20.5	13/16	82	74	310	443	342	488
22	7/8	88	79	356	509	393	560
24	15/16	96	86	422	604	465	664
26	1	104	94	493	706	544	776
28	1/ 1/8	112	101	570	815	629	897
30	1/ 3/16	120	108	651	932	719	1026
32	1/ 1/4	128	115	738	1057	815	1163
34	1/ 3/8	136	122	830	1188	916	1308
36	1/ 7/16	144	130	927	1327	1023	1460
38	1/ 1/2	152	137	1029	1473	1136	1621
40	1/ 9/16	160	144	1136	1625	1253	1789
42	1/ 5/8	168	151	1247	1785	1376	1964
44	1/ 3/4	176	158	1364	1951	1505	2147
46	1/ 13/16	184	166	1485	2124	1638	2338
48	1/ 7/8	192	173	1610	2304	1777	2535
50	1/ 15/16	200	180	1740	2490	1920	2740
52	2/ 1/16	208	187	1874	2682	2068	2952
54	2/ 1/8	216	194	2013	2881	2222	3170
56	2/ 3/16	224	202	2156	3086	2380	3396
58	2/ 1/4	232	209	2304	3297	2542	3628
60	2/ 3/8	240	216	2455	3514	2710	3867
62	2/ 7/16	248	223	2611	3737	2881	4112
64	2/ 1/2	256	230	2771	3965	3058	4364
66	2/ 9/16	264	238	2935	4200	3238	4621
68	2/ 11/16	272	245	3102	4440	3423	4885
70	2/ 3/4	280	252	3274	4685	3613	5156
73	2/ 7/8	292	263	3538	5064	3904	5572
76	3	304	274	3811	5454	4205	6001
78	3/ 1/16	312	281	3997	5720	4411	6295
81	3/ 3/16	324	292	4283	6130	4726	6745
84	3/ 5/16	336	302	4577	6550	5051	7208
87	3/ 7/16	348	313	4878	6981	5383	7682
90	3/ 1/2	360	324	5187	7422	5723	8167
92	3/ 5/8	368	331	5396	7722	5954	8497
95	3/ 3/4	380	342	5716	8180	6307	9001
97	3/ 13/16	388	349	5933	8490	6547	9343
100	3/ 15/16	400	360	6264	8964	6912	9864
102	4	408	367	6488	9285	7159	10217
107	4/ 1/4	428	385	7060	10103	7790	11118
111	4/ 3/8	444	400	7529	10775	8308	11856
114	4/ 1/2	456	410	7887	11287	8703	12420
117	4/ 5/8	468	421	8251	11807	9104	12993
122	4/ 3/4	488	439	8868	12690	9785	13964

For Information Purposes Only