


C LINK CONNECTOR - GRADE 4

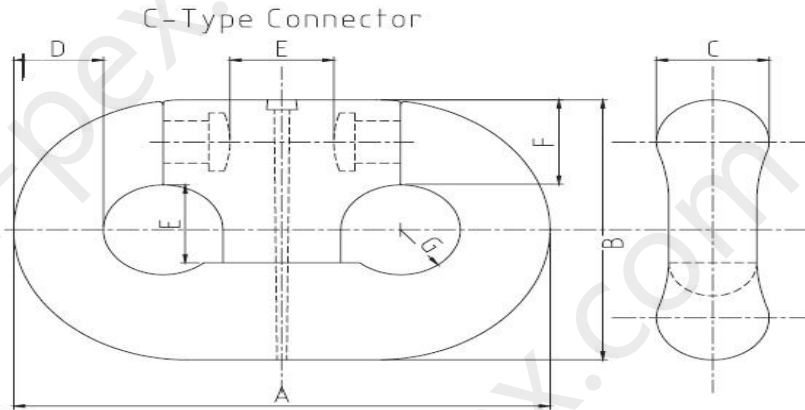

CHAIN SIZE		-A-	-B-	-C-	-D-	-E-	-F-	-G-	Weight		Proof Load Grade 4 [KN]	Break Load Grade 4 [KN]
mm	inches	mm	mm	mm	mm	mm	mm	mm	Kg	lbs		
50-51	1-15/16-2	305	197	64	51	59	64	34	16.3	35.9	2243	2845
52-54	2-1/16-2-1/8	324	209	67	54	63	68	36	20	44.1	2499	3170
56-58	2-3/16-2-1/4	343	222	71	58	66	71	38	23.6	52	2860	3628
59 - 60	2-5/16-2-3/8	364	235	78	61	70	76	41	28	61.7	3048	3867
62- 64	2-7/16-2-1/2	381	246	79	64	74	79	43	32.2	71	3440	4363
66 - 61	2-9/16-2-5/8	400	259	83	67	77	83	45	37	81.6	3747	4753
68-70	2-11/16-2-3/4	419	271	87	70	81	87	47	45	99.2	4064	5156
71 - 73	2-13/16-2-7/8	438	283	91	73	85	91	49	49	108	4392	5572
75-76	2-15/16- 3	457	296	95	76	88	95	51	55	121	4731	6001
78 - 79	3-1/16 - 3-1/8	476	308	99	79	92	99	53	63	139	5079	6443
81-83	3-3/16 - 3-1/4	495	320	103	83	96	103	55	73	161	5559	7052
84 - 86	3-5/16 - 3-3/8	514	333	107	86	99	107	57	80	176	5930	7522
87-89	3-7/16-3-1/2	533	345	111	89	103	111	60	93	205	6310	8004
90 - 92	3-9/16-3-5/8	553	357	115	92	107	115	62	97.6	215	6699	8498
94-95	3-11/16-3-3/4	572	370	119	95	111	119	64	116.2	256	7096	9002
97-98	3-13/16 - 3-7/8	591	382	128	98	114	123	66	123	271	7501	9516
100-102	3-15/16 - 4	610	394	132	102	118	127	68	131	289	8055	10217
105	4-1/8	629	419	147	105	127	132	70	175	386	8478	10755
111	4-3/8	667	456	167	111	138	140	75	208	459	9347	11857
114	4-1/2	686	480	190	114	147	144	77	227	500	9792	12421

For Information Purposes Only