


LONG OPEN LINK CHAINS (PITCH = 4 X SIZE)

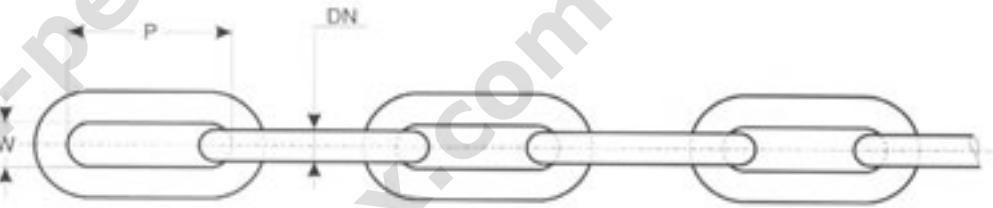

Upon request, chains are manufactured in SL 1 or SL 2 qualities as agreed to the Bureau Veritas.

Upon request, SL 3 quality.

DN	P	W	Qualite DL1	Quality SL1	Qualite SL2	Quality SL2	Nombre De	
Nominal size	Pas Pitch	Largeur Width	TENSION Proof load	RUPTURE Breaking load	TENSION Proff load	RUPTURE Breaking load	maillles/m NUMBER of links/m	kg /m
18	72	25	76	152	96	192	13.9	6.4
20	80	28	104	208	132	264	12.5	7.9
22	88	31	120	240	152	304	11.4	9.5
24	96	34	143	286	181	362	10.4	11.3
26	104	36	167	334	212	424	9.6	13.3
28	112	39	194	388	246	492	8.9	15.4
30	120	42	223	446	283	566	8.3	17.7
32	128	45	253	506	322	644	7.8	20.2
34	136	48	286	572	363	726	7.4	22.8
36	144	50	321	642	407	814	6.9	25.5
38	152	53	357	714	454	900	6.6	28.4
40	160	56	396	792	505	1010	6.3	31.5
42	168	59	436	872	555	1110	6	34.7
44	176	62	479	958	610	1220	5.7	38.1
46	184	64	525	1050	665	1330	5.4	41.7
48	192	67	570	1140	725	1450	5.2	45.4
50	200	70	620	1240	785	1570	5	49.2